

\* Seek the Architect's advice if conditions on site prove to be different and not allowing the detail shown herein.

#### Paving- Schedule of works:

All works to take place in sections starting from the lower ground level to the north and finishing south with the higher level as shown on the reference plan.


Suggested sequence of works: Side C, Sides D&B, Sides A&E, Sides F& H, Side G.

To each side at a time, carefully take up all paving flags after having recorded these in sufficient detail to recreate the existing pattern and set aside safely for reinstatement after ground works are complete.

Excavate to the required depth without disturbing the memorial's foundations and provide the specified subbase over geotextile membrane, well compacted to the full extent and to form the required slope away from the monument. Reinstall the flags on a sand bedding min 30mm (depending on size and thickness of stone slab), all to the required fall. Start with the outer course, followed by the inner course flags which will have to be cut off by 100mm to create the gravel edge. Repoint with a hydraulic mortar mix 1:2.25:0.25 NHL 3.5: well graded sand: graded crushed stone.

Repeat this process from side to side taking care to provide continuity between all layers and a level paving surface to the required fall away from the memorial.

Fill in the edge gap with limestone gravel to match the colour of the stone paving, in slight recess from the paving level (up to 10mm) to provide containment of the loose material.

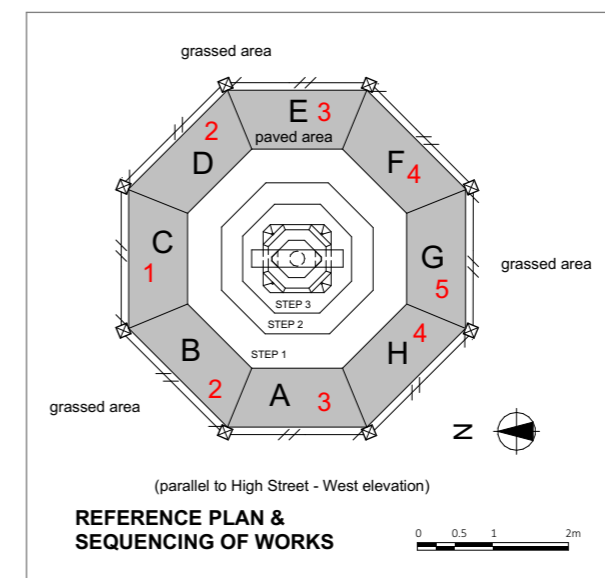

Rev A- Jul 2021: Updated for LBC/ tender

Suite S8, The Catalyst,  
University of York, East Campus  
Baird Lane, Heslington,  
York YO10 5GA

T: 01904 623034  
E: post@ppiy.co.uk



Do not scale off this drawing. If in doubt ask.  
Scale correct when drawing printed at A3

**Colsterworth War Memorial  
Stone Investigation & Repairs  
Landscaping detail**

SCALE 1:5, 1:100  
DATE MAR 2021  
DRAWN EP

REV  
**A**

3501/102

All Drawings Copyright of PPIY Limited